

Features

- ✧ Four channel full-duplex transceiver modules
- ✧ Hot pluggable QSFP form factor
- ✧ Four channel 850nm VCSEL Array
- ✧ Four channel PIN detector Array
- ✧ Data rate up to 28Gbps per channel
- ✧ Maximum link length of 70m on OM3 Multimode Fiber (MMF) and 100m on OM4 MMF
- ✧ Maximum Power dissipation <3.5W
- ✧ Single 1x12 MPO receptacle
- ✧ Single +3.3V power supply operating
- ✧ Built-in digital diagnostic functions
- ✧ Operating Case Temperature:0°C~+70°C
- ✧ RoHS-6 compliant (lead-free)

Applications

- ✧ IEEE 802.3ba 100GBASE SR4 and 40GBASE SR4
- ✧ Data centers and Metro networks
- ✧ Other Optical Links

Standard


- ✧ Compliant with 100G Ethernet IEEE802.3ba
- ✧ Compliant with 100GBASE-SR4 Standard
- ✧ Compliant with SFF-8436 QSFP+ MSA

Description

The QSFP28 SR4 module is a 100Gb/s optical transceiver module for serial optical communication applications, the design is compliant to 100GBASE-SR4 of the IEEE P802.3ba standard, and transmission distance up to 70m on OM3 MMF and 100m on OM4 MMF. Digital diagnostics functions are available via an I2C interface as specified by the SFF-8436 QSFP+ MSA.

The module is hot pluggable into the 38-pin connector. The high-speed electrical interface is based on low voltage logic, with nominal 100 Ohms differential impedance and AC coupled in the module. The module has 5 low speed pins for control and status.

A block diagram of QSFP+SR4 optical transceiver is shown below

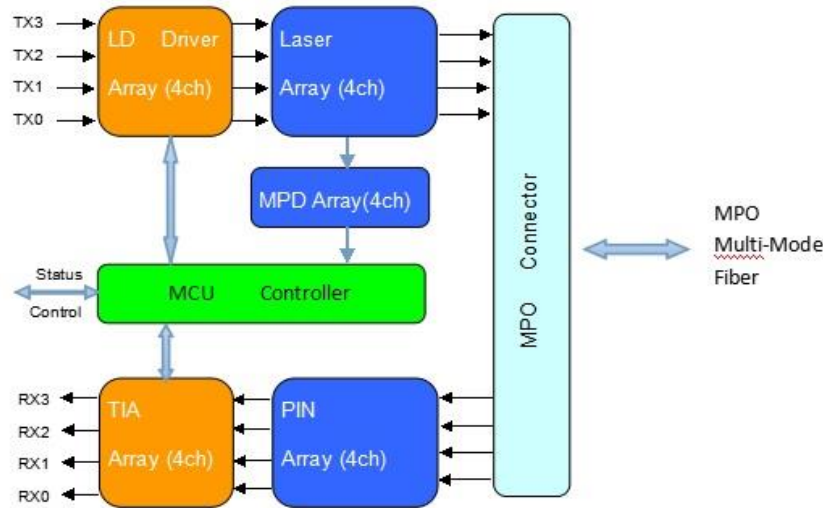

Specification

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Storage Temperature	TST	-20	+75	℃
Operating Case Temperature	Top	0	+70	
Supply Voltage	VCC3	0.0	+3.6	V
Relative Humidity	RH	5	95	%

Recommend Operation Environment

Parameter	Symbol	Min	Typ	Max	Unit
Date Rate(per channel)			25.78125		Gb/s
Supply Voltage	VCC	3.13	3.3	3.47	V
Supply Current	ICC			1060	mA
Power Dissipation	PD			3.5	W
Operating Case Temperature	TOP	0		+70	℃

Optical Characteristics (Condition: Ta=TOP)

Parameter	Symbol	Min	Type	Max	Unit	Note
Transmitter						
Date Rate(per channel)			25.78	28	Gb/s	
Optical Wavelength	λ_0	840	850	860	nm	
RMS Spectrum Width	$\Delta \lambda$	-	-	0.6	nm	
Average output power, each lane	Po	-8.4	-	2.4	dBm	1
Optical Modulation Amplitude, each Lane	OMA	-6.4	-	3.0	dBm	
Optical Extinction Ratio	ER	2			dB	1
Dispersion penalty, each lane				4.3	dB	
Optical Return Loss Tolerance		-	-	12	dB	
Average Launch Power OFF Transmitter , each Lane	Poff			-30	dBm	
Relative Intensity Noise	Rin			-128	dB/HZ	
Eye Mask definition(X1,X2,X3,Y1,Y2,Y3)		SPECIFICATION VALUES {0.3,0.38,0.45,0.35,0.41,0.5}				Hit Rati o = 5x10 -5
Receiver						
Date Rate(per channel)			25.78	28	Gb/s	
Receiver Sensitivity, each Lane		-	-	-10.3	dBm	
Maximum Receiver Power, each lane			-	2.4	dBm	
Receiver Power (OMA), each Lane				-5.2	dB	2
Stressed Receiver Sensitivity in OMA each Lane				-5.4	dBm	
LOS De-Assert	LOSD			-10.3	dBm	
LOS Assert	LOSA	-30			dBm	
LOS Hysteresis		0.5			dB	
Receiver Reflectance				-12	dB	

Notes:

Note 1) Measured at 25.78Gb/s with PRBS 2³¹ – 1 NRZ test pattern.

Note 2) Measured at 25.78Gb/s with PRBS 2³¹ – 1 NRZ test pattern for BER < 1x10⁻⁵

Electrical Characteristics (Condition: Ta=TOP)


Parameter	Symbol	Min	Typ	Max	Unit	Note
Supply Current	Icc			1060	mA	
Control I/O Voltage-High	VIH	2.0		Vcc	V	
Control I/O Voltage-Low	VIL	0		0.8	V	
RESETL Duration			10		Us	
RESETL De-assert time				100	ms	
Power On Time				100	ms	
Transmitter						
Differential input voltage swing	VI	200		1200	mVpp	1
Common mode voltage tolerance		15			mV	
Input Differential Impedance	Zin	90	100	110	Ω	
Receiver						
Differential output voltage swing		400		1000	mVpp	2
Rx Output Rise and Fall Time(20% to 80%)	Tr/Tf	28			ps	
Output Differential Impedance	Zon	90	100	110	Ω	

Notes:

- 1) TD+/- are internally AC coupled with 100Ω differential termination inside the module.
- 2) RD+/- outputs are internally AC coupled, and should be terminated with 100Ω (differential) at the user SERDES.

Pin Assignment

Diagram of Host Board Connector Block Pin Numbers and Name

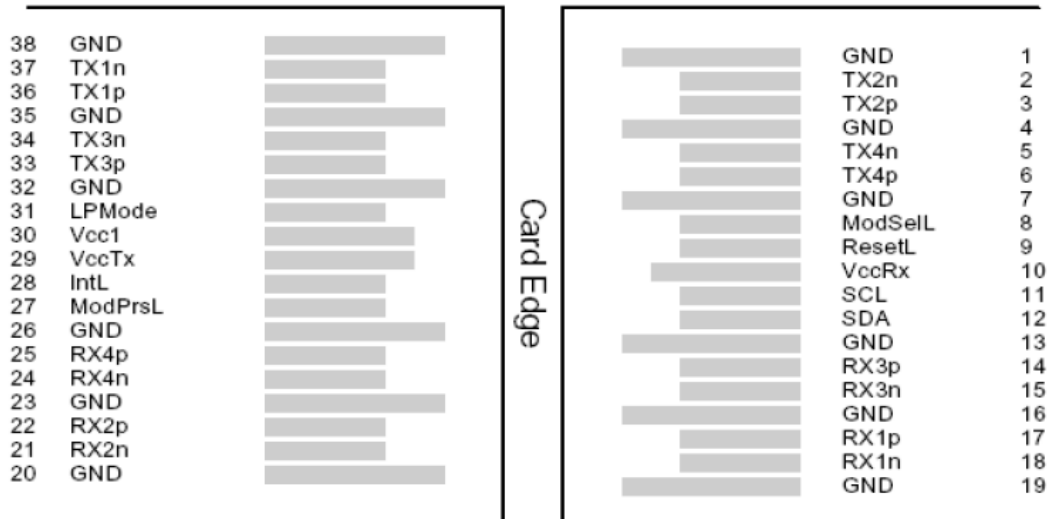

Shenzhen Hi-Optel Technology Co., Ltd.

Hi-Optel Building,BLOG2,Gaofa Technology Park,Longjing,Nanshan Shenzhen,China. 518055

Tel: +86 755 2675 3088

Fax: +86 755 2675309

E-mail: info@hioptel.com

[Http://www.hioptel.com](http://www.hioptel.com)

Pin Description

Pin	Logic	Symbol	Name/Description	Ref.
1		GND	Ground	1
2	CML-I	Tx2n	Transmitter Inverted Data Input	
3	CML-I	Tx2p	Transmitter Non-Inverted Data output	
4		GND	Ground	1
5	CML-I	Tx4n	Transmitter Inverted Data Output	
6	CML-I	Tx4p	Transmitter Non-Inverted Data Output	
7		GND	Ground	1
8	LVTTL-I	ModSelL	Module Select	
9	LVTTL-I	ResetL	Module Reset	
10		VccRx	+3.3V Power Supply Receiver	2
11	LVC MOS-I/O	SCL	2-Wire Serial Interface Clock	
12	LVC MOS-I/O	SDA	2-Wire Serial Interface Data	
13		GND	Ground	1
14	CML-O	Rx3p	Receiver Inverted Data Output	
15	CML-O	Rx3n	Receiver Non-Inverted Data Output	
16		GND	Ground	1
17	CML-O	Rx1p	Receiver Inverted Data Output	
18	CML-O	Rx1n	Receiver Non-Inverted Data Output	
19		GND	Ground	1
20		GND	Ground	1
21	CML-O	Rx2n	Receiver Inverted Data Output	
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	
23		GND	Ground	1
24	CML-O	Rx4n	Receiver Inverted Data Output	
25	CML-O	Rx4p	Receiver Non-Inverted Data Output	
26		GND	Ground	1
27	LVTTL-O	ModPrsL	Module Present	
28	LVTTL-O	IntL	Interrupt	
29		VccTx	+3.3V Power Supply Transmitter	2
30		Vcc1	+3.3V Power Supply	2
31	LVTTL-I	LPMode	Low Power Mode	
32		GND	Ground	1
33	CML-I	Tx3p	Transmitter Inverted Data Output	
34	CML-I	Tx3n	Transmitter Non-Inverted Data Output	
35		GND	Ground	1
36	CML-I	Tx1p	Transmitter Inverted Data Output	
37	CML-I	Tx1n	Transmitter Non-Inverted Data Output	
38		GND	Ground	1

Notes:

- 1)GND is the symbol for single and supply(power) common for QSFP modules, All are common within the QSFP module and all module voltages are referenced to this potential otherwise noted. Connect these directly to the host board signal common ground plane.
- 2)VccRx, Vcc1 and VccTx are the receiver and transmitter power suppliers and shall be applied concurrently. Recommended host board power supply filtering is shown below. VccRX, Vcc1 and VccTx may be internally connected within the QSFP transceiver module in any combination. The connector pins are each rated for maximum current of 500mA

Digital Diagnostic Monitoring Interface

Digital diagnostics monitoring function is available on QSFP28 SR4. Real time monitoring include Module temperature, Module supply voltage, and monitoring for each transmit and receive channel. the Memory Map for QSFP28 Module used for serial ID, digital monitoring and certain control functions. The interface is mandatory for all QSFP28 devices.

The structure of the memory is shown in Table 1..The memory space is arranged into a lower, single page, address space of 128 bytes and multiple upper address space pages. This structure permits timely access to addresses in the lower page, such as Interrupt Flags and Monitors. Less time critical time entries, such as serial ID information and threshold settings, are available with the Page Select function.

The interface address used is A0xh and is mainly used for time critical data like interrupt handling in order to enable a one-time-read for all data related to an interrupt situation. After an interrupt, IntL, has been asserted, the host can read out the flag field to determine the affected channel and type of flag.



Table 1. Digital Diagnostic Memory Map (Specific Data Field Descriptions)


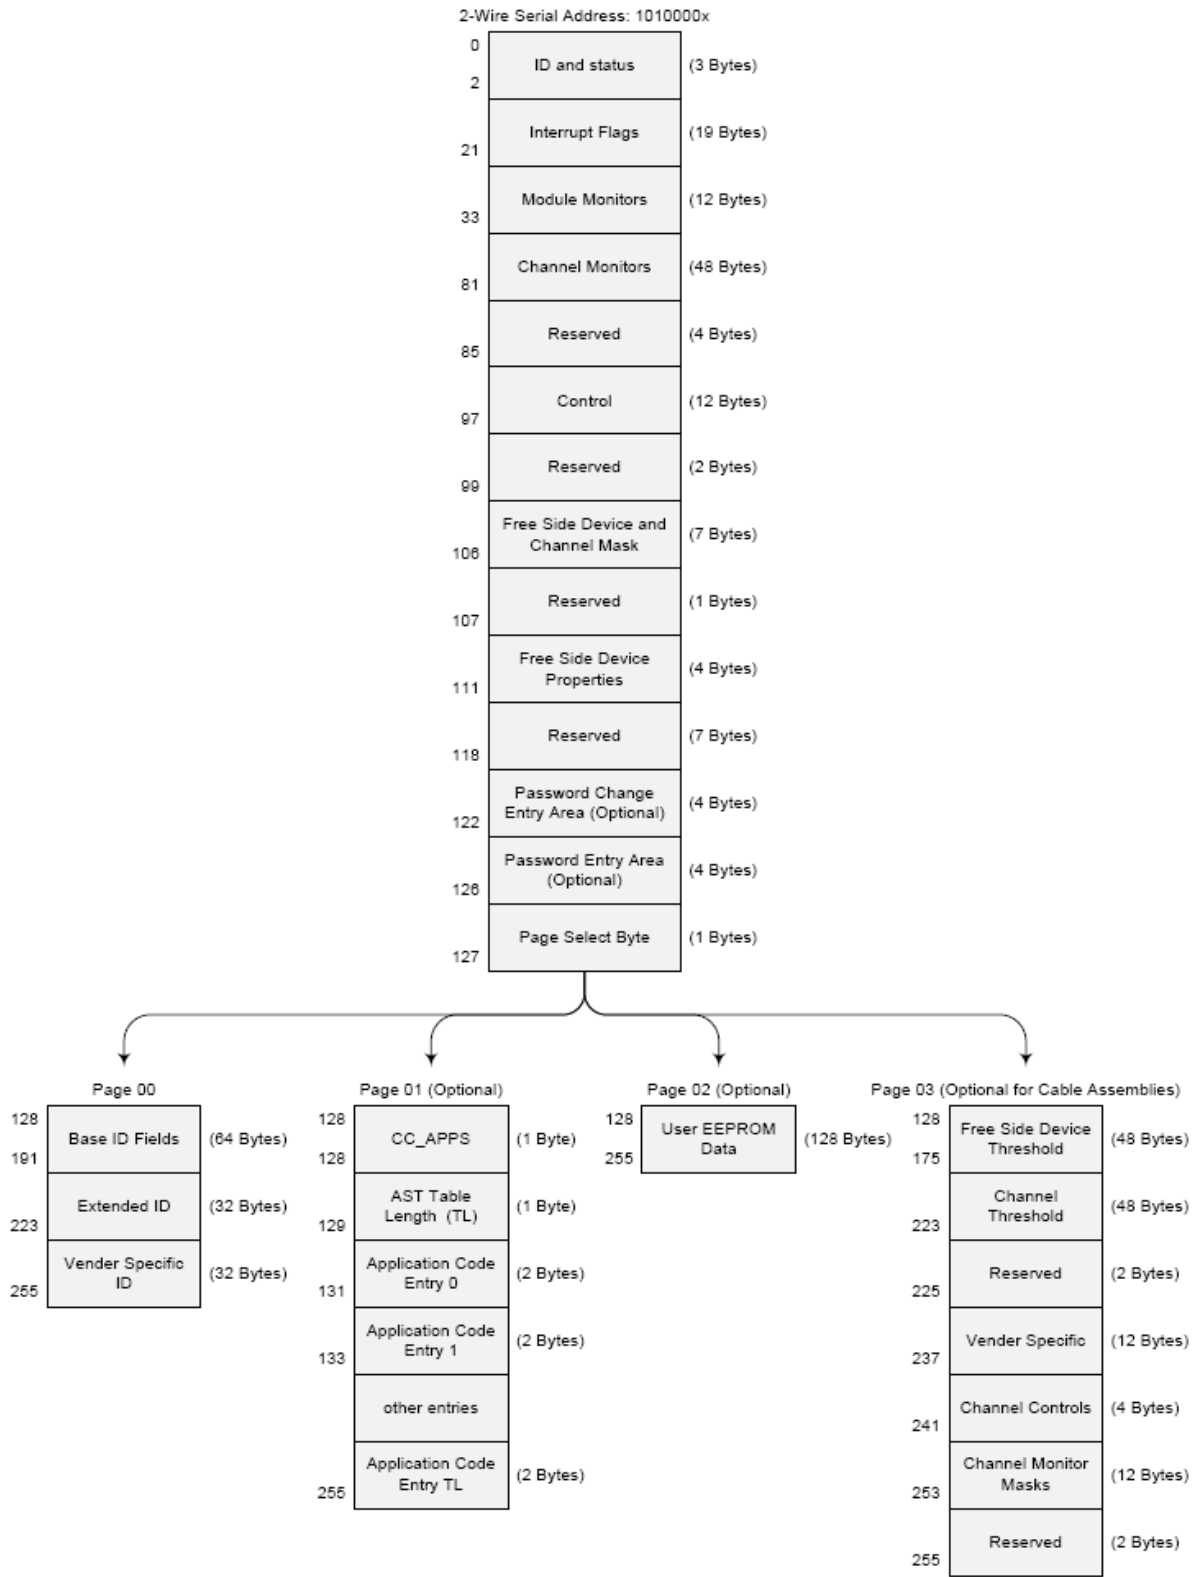



Table 2 - EEPROM Serial ID Memory Contents (A0h)

Address	Description	Type	Passive Copper, Active Copper, Active Optical	Optical Module
0	Identifier (1 Byte)	Read-Only	R	R
1-2	Status (2 Bytes)	Read-Only	See Table 18	
3-21	Interrupt Flags (19 Bytes)	Read-Only	See Tables 19-21	
22-33	Module Monitors (12 Bytes)	Read-Only	See Table 22	
34-81	Channel Monitors (48 Bytes)	Read-Only	See Table 23	
82-85	Reserved (4 Bytes)	Read-Only	Reserved	
86-97	Control (12 Bytes)	Read/Write	See Table 24	
98-99	Reserved (2 Bytes)	Read/Write	Reserved	
100-106	Module and Channel Masks (7 Bytes)	Read/Write	See Table 25	
107-118	Reserved (12 Bytes)	Read/Write	Reserved	
119-122	Password Change Entry Area (optional) (4 Bytes)	Read/Write	O	O
123-126	Password Entry Area (optional) 4 Bytes	Read/Write	O	O
127	Page Select Byte	Read/Write	R	R

Mechanical Dimensions

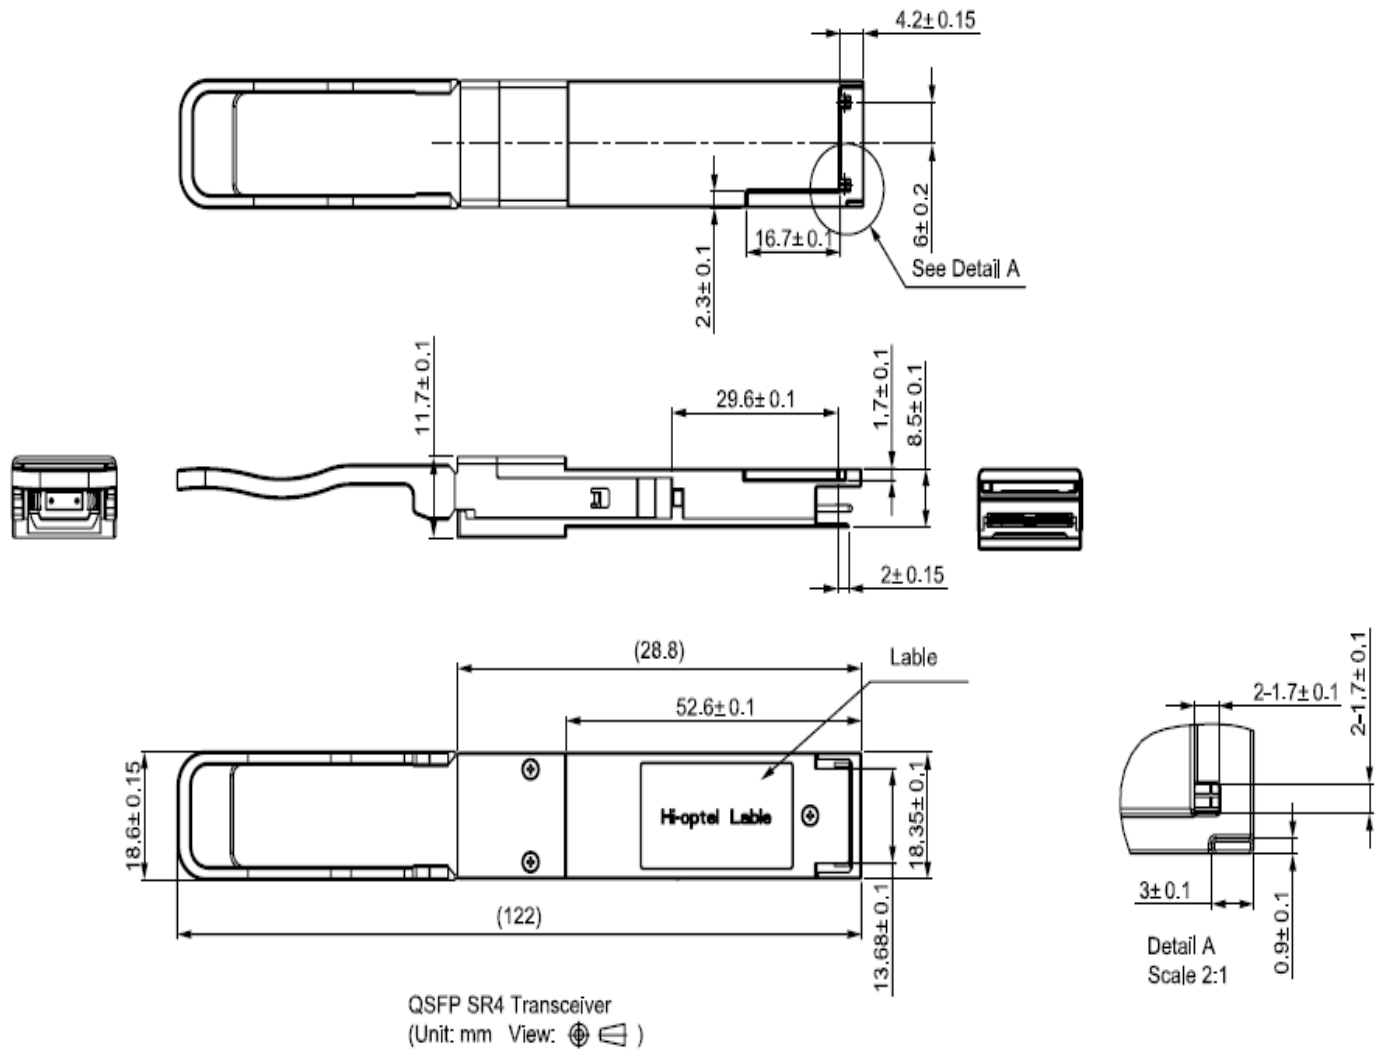

Recommended Circuit

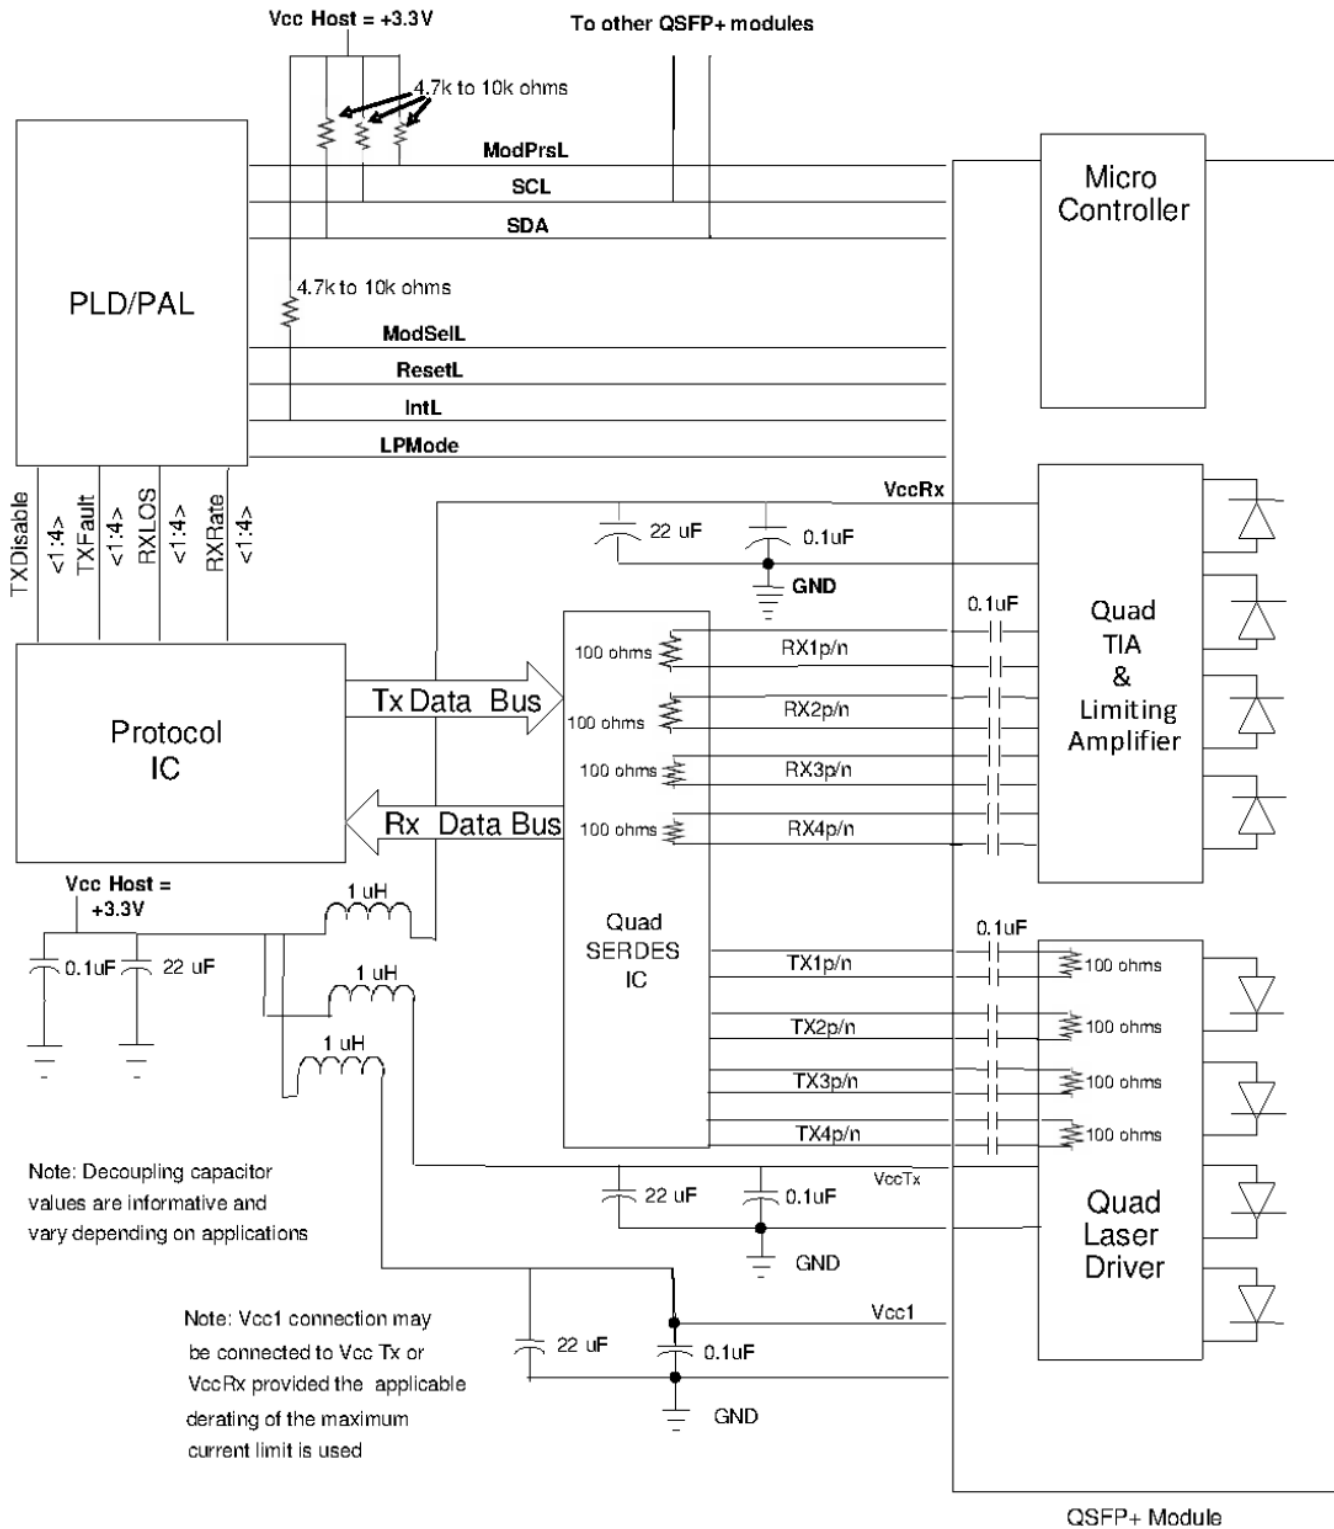

Recommended High-speed Interface Circuit Circuit

Ordering information

HQSFP□□-□□□□

Data Rate

10: 40G
28: 100G

App Type

2: LR4
3: SR4
4: eSR4

Wavelength

3: 1310nm
5: 1550nm
8: 850nm
C: CWDM
D: DWDM

Customer Specific Code

Optical Device Type

1: VCSEL/ PIN-TIA
2: DFB-LD / PIN-TIA