

25Gb/s SFP28 SR Optical Transceiver

HSFP28-3831

850nm VCSEL/PIN-TIA, 100m, 0~70°C



Features

- ✧ Compliant with MSA SFP+ Specification SFF-8402
- ✧ Monitoring Interface Compliant with SFF-8472
- ✧ Single +3.3V Power Supply
- ✧ Hot-Pluggable
- ✧ Built-in dual CDR
- ✧ Up to 28.05 Gb/s Data Links
- ✧ Up to 100m on 50/125 um OM4
- ✧ Up to 70m on 50/125 um OM3
- ✧ Very low EMI and excellent ESD protection
- ✧ Operating Case Temperature: 0°C~+70°C
- ✧ Power Dissipation < 1.2W
- ✧ RoHS Compliant Products




Applications

- ✧ 25GbE
- ✧ Other Optical Links

Description

HSFP28-3831 is SFP28 module ,which is designed for use in 25Gb/s data rate over multimode fiber. It is with the SFP+ 20-pin connector to allow hot plug capability. Digital diagnostic functions are available via an I2C. It has built-in dual clock and data recovery (CDR). This module is designed for multi-mode fiber and operates at a nominal wavelength of 850nm. The transmitter section uses a high performance 850nm VCSEL laser and is a class 1 laser compliant according to International Safety Standard IEC-60825. The receiver section uses an integrated InGaAs detector pre-amplifier (IDP) mounted in an optical header and a limiting post-amplifier IC.

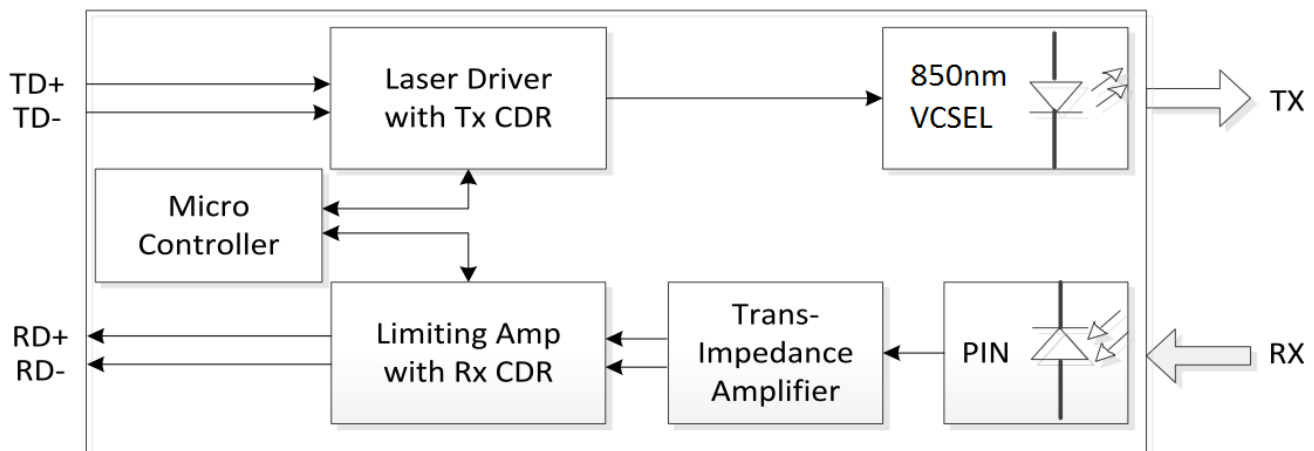

SFP28 SR Module

Shenzhen Hi-Optel Technology Co., Ltd.

Hi-Optel Building, BLOG2, Gaofa Technology Park, Longjing, Nanshan Shenzhen, China. 518055

Tel: +86 755 2675 3088

Fax: +86 755 2675309

E-mail: info@hioptel.com

[Http://www.hioptel.com](http://www.hioptel.com)

Specification

Electrical Characteristics: (Condition: $T_a = T_{OP}$)

Parameter	Symbol	Min.	Typical	Max.	Unit
Link Distance with 50/125 um MMF OM4	-	-	-	100	m
Power Dissipation	-	-	-	1.2	W
Transmitter:					
Transmitter Differential Input Volt ^{*Note1}	+/-TX_DAT	180		1600	mV p-p
Input Impedance (Differential)	Z _{in}		100		Ω
Tx_Disable Input Voltage – Low	V _{IL}	-0.3		0.8	V
Tx_Disable Input Voltage – High	V _{IH}	2.0		V _{CC} +0.3	V
Tx_Fault Output Voltage – Low	V _{OL}	-0.3		0.8	V
Tx_Fault Output Voltage – High	V _{OH}	2.0		V _{CC} +0.3	V
Receiver:					
Receiver Differential Output Volt ^{*Note1}	+/-RX_DAT	370		850	mV p-p
Output Impedance (Differential)	Z _{out}		100		Ω
Rx_LOS Output Voltage- Low	V _{OL}	-0.3		0.8	V
Rx_LOS Output Voltage- High	V _{OH}	2.0		V _{CC} +0.3	V

Note1: AC coupled.

Optical Characteristics: (Condition: $T_a = T_{OP}$)

Transmitter:

Parameter	Symbol	Min.	Typical	Max.	Unit
Data Rate	B	-	25.78	-	Gb/s
Centre Wavelength	λ_c	840	850	860	nm
Output Spectral Width	$\Delta\lambda(\text{RMS})$	-	-	0.6	nm
Average Output Power ^{*Note1}	P _o	-8.4	-	2.4	dBm
Extinction Ratio ^{*Note2}	E.R.	2	-	-	dB
Transmitter and Dispersion Eye Closure	TDEC	-	-	4.3	dB
Output Optical Eye	Compliant to IEEE802.3by				

Receiver:

Parameter	Symbol	Min.	Typical	Max.	Unit
Date Rate	B	-	25.78	-	Gb/s
Receive Sensitivity ^{*Note3}	P _{min}	-	-	-10.3	dBm
Maximum Input Power	P _{max}	3.0	-	-	dBm
Signal Detect Threshold-De-Assert	S _D			-13	dBm

Shenzhen Hi-Optel Technology Co., Ltd.

Hi-Optel Building,BLOG2,Gaofa Technology Park,Longjing,Nanshan Shenzhen,China. 518055

Tel: +86 755 2675 3088

Fax: +86 755 2675309

E-mail: info@hioptel.com

[Http://www.hioptel.com](http://www.hioptel.com)

25Gb/s SFP28 SR Optical Transceiver

HSFP28-3831

850nm VCSEL/PIN-TIA, 100m, 0~70℃



Signal Detect Threshold-Assert	S_A	-30			dBm
Stressed Receiver Sensitivity(OMA)	RxSENS	-	-	-5.2	dBm
Receiver Reflectance				-12	dB
Hysteresis	-	0.5	-		dB
Optical Return Loss	ORL	-	-	-12	dB
Operating Wavelength	λ_c	840	-	860	nm

Note1: Measured with 50/125μm multi-mode fiber.

Note2: Measured with a PRBS 2³¹-1 test pattern @25.78Gb/s

Note3: Measured with ER=2dB, 2³¹-1 PRBS data pattern, BER less than 5E-5.

Absolute Maximum Ratings: (T_C=25℃)

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	T _{ST}	-40	+85	℃
Operating Temperature	T _{IP}	0	+70	℃
Input Voltage	T _{CC}	0	+4.0	V
Operating Relative Humidity	RH	5	95	%

Note: Exceeding any one of these values may destroy the device permanently.

Recommended Operating Environment:

Parameter	Symbol	Min.	Typical	Max.	Unit
Supply Voltage	V _{CC}	+3.135	+3.3	+3.465	V
Operating Temperature	T _{OP}	0	-	+70	℃

Regulatory Compliance

Feature	Standard	Performance
Electrostatic Discharge(ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7	Class 1(>500 V)
Electrostatic Discharge(ESD) To the Duplex Receptacle	IEC61000-4-2	Class 2(>4000V)
Electromagnetic Interference (EMI)	FCC Part 15 Class B	Compatible with standards
Immunity	IEC61000-4-3	Compatible with standards
Laser eye safety	FDA21CFR1040.10and1040.11 EN60950, EN (IEC) 60825-1,2	Compatible with Class I laser product
Component Recognition	UL and CE	Compatible with standards
ROHS	ROHS6	Compatible with standards

Note: For the latest certification information, please check with Hi-Optel.

Shenzhen Hi-Optel Technology Co., Ltd.

Hi-Optel Building,BLOG2,Gaofa Technology Park,Longjing,Nanshan Shenzhen,China. 518055

Tel: +86 755 2675 3088

Fax: +86 755 2675309

E-mail: info@hioptel.com

[Http://www.hioptel.com](http://www.hioptel.com)



Pin Assignment

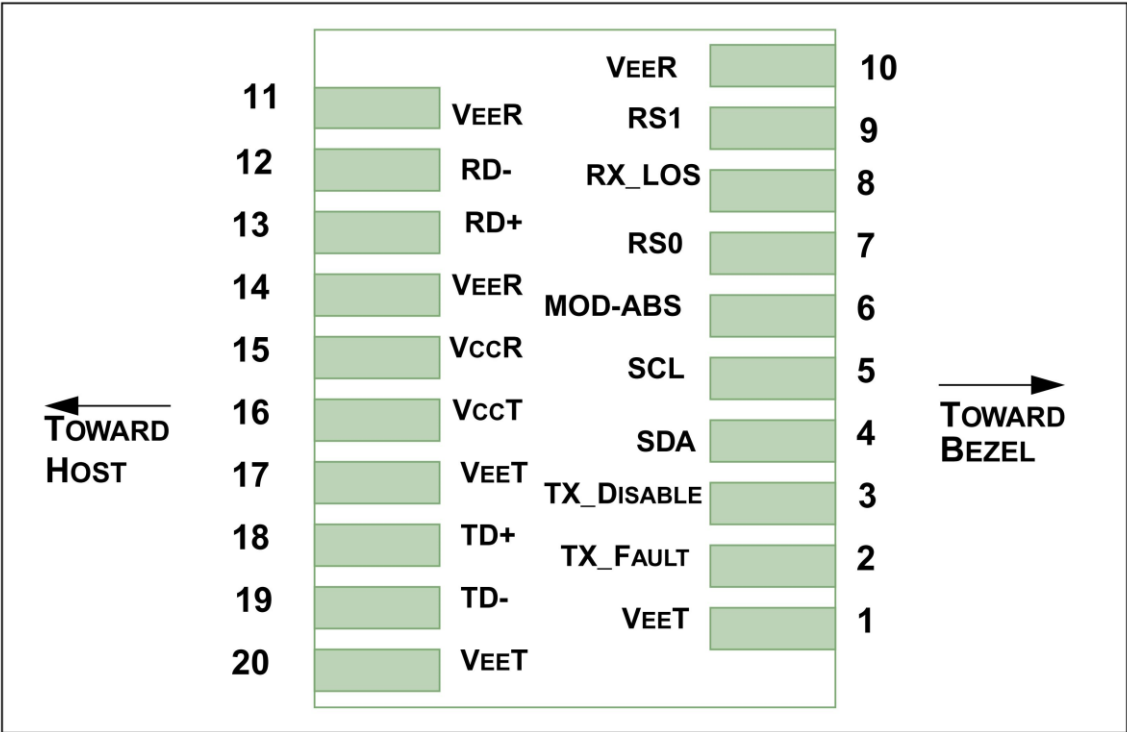


Figure 1 Host PCB SFP+ Pad Pinout Top View

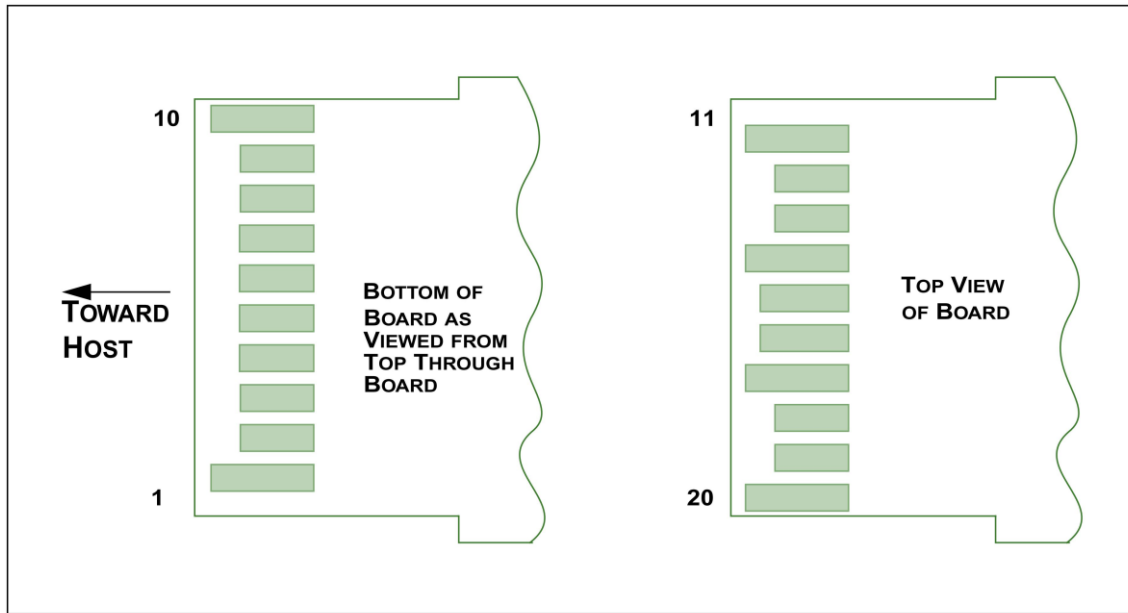


Figure 2 SFP+ Module PCB Pinout

Pin Description

Pin	Symbol	Name/Description	Ref
1	VeeT	Transmitter Ground(Common with Receiver Ground)	1
2	Tx Fault	Transmitter Fault. Low normal operation, High Fault indication	
3	Tx Disable	Transmitter Disable. Laser output disabled on high or open	2
4	SDA	Module Definition 2.Data line for Serial ID	3
5	SCL	Module Definition 1.Clock line for Serial ID	3
6	MOD-ABS	Module Definition 0.Grounded within the module	
7	RS0	Rate Select 0, optionally controls SFP28 module receiver. LVTTTL Logic.	5
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	4
9	RS1	Rate Select 1, optionally controls SFP28 module transmitter. LVTTTL Logic.	5
10	VeeR	Receiver Ground(Common with Transmitter Ground)	1
11	VeeR	Receiver Ground(Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out.AC Coupled	
13	RD+	Receiver Non-inverted DATA out.AC Coupled	
14	VeeR	Receiver Ground(Common with Transmitter Ground)	1
15	VccR	Receiver Power Supply	
16	VccT	Transmitter Power Supply	
17	VeeT	Transmitter Ground(Common with Receiver Ground)	1
18	TD+	Transmitter Non-inverted DATA in.AC Coupled	
19	TD-	Transmitter Inverted DATA in.AC Coupled	

25Gb/s SFP28 SR Optical Transceiver

HSFP28-3831

850nm VCSEL/PIN-TIA, 100m, 0~70℃



20	VeeT	Transmitter Ground(Common with Receiver Ground)	1
----	------	---	---

Notes:

1. Circuit ground is internally isolated from chassis ground. VeeR and VeeT may be internally connected within the SFP28 module.
2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 3.6V.
4. LOS is open collector output. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
5. Pulled low to VeeR or VeeT with a >30K resistor within the SFP28 module.

Data Field Descriptions

The Module provides diagnostic information about the present operating conditions. The transceiver generates this diagnostic data by digitization of internal analog signals. Calibration and alarm/warning threshold data is written during device manufacture. Received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring all are implemented.

The digital diagnostic memory map specific data field define as following .For detail EEPROM information, please refer to the related document of SFF 8472 Rev 12.2.

Shenzhen Hi-Optel Technology Co., Ltd.

Hi-Optel Building,BLOG2,Gaofa Technology Park,Longjing,Nanshan Shenzhen,China. 518055

Tel: +86 755 2675 3088

Fax: +86 755 2675309


E-mail: info@hioptel.com

[Http://www.hioptel.com](http://www.hioptel.com)

Page 6 of 7

Rev1.0

Issued Date: 2017-09-30

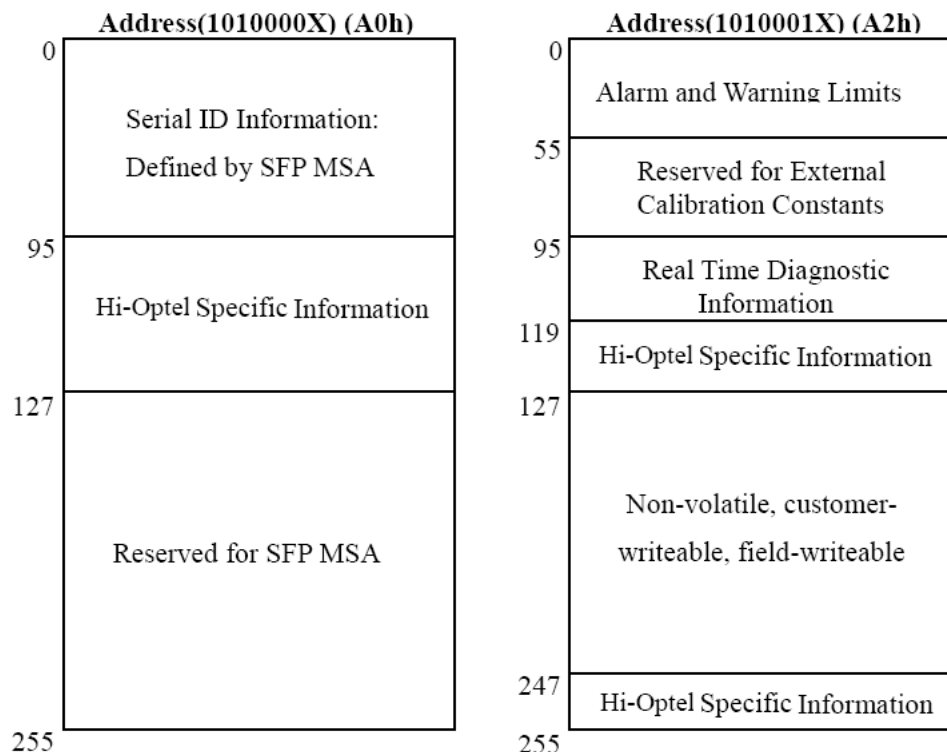


Digital Diagnostic Monitor Characteristics

A2h address	Parameter	Calibration	Accuracy	Unit
96-97	Temperature	Internal	+/- 3	℃
98-99	Vcc	Internal	+/- 3%	V
100-101	Tx bias	Internal	+/- 10%	mA
102-103	Tx power	Internal	+/- 3dB	dB
104-105	Rx Power	Internal	+/- 3dB	dB

Mechanical Dimensions:

25Gb/s SFP28 SR Optical Transceiver
HSFP28-3831
850nm VCSEL/PIN-TIA, 100m, 0~70℃

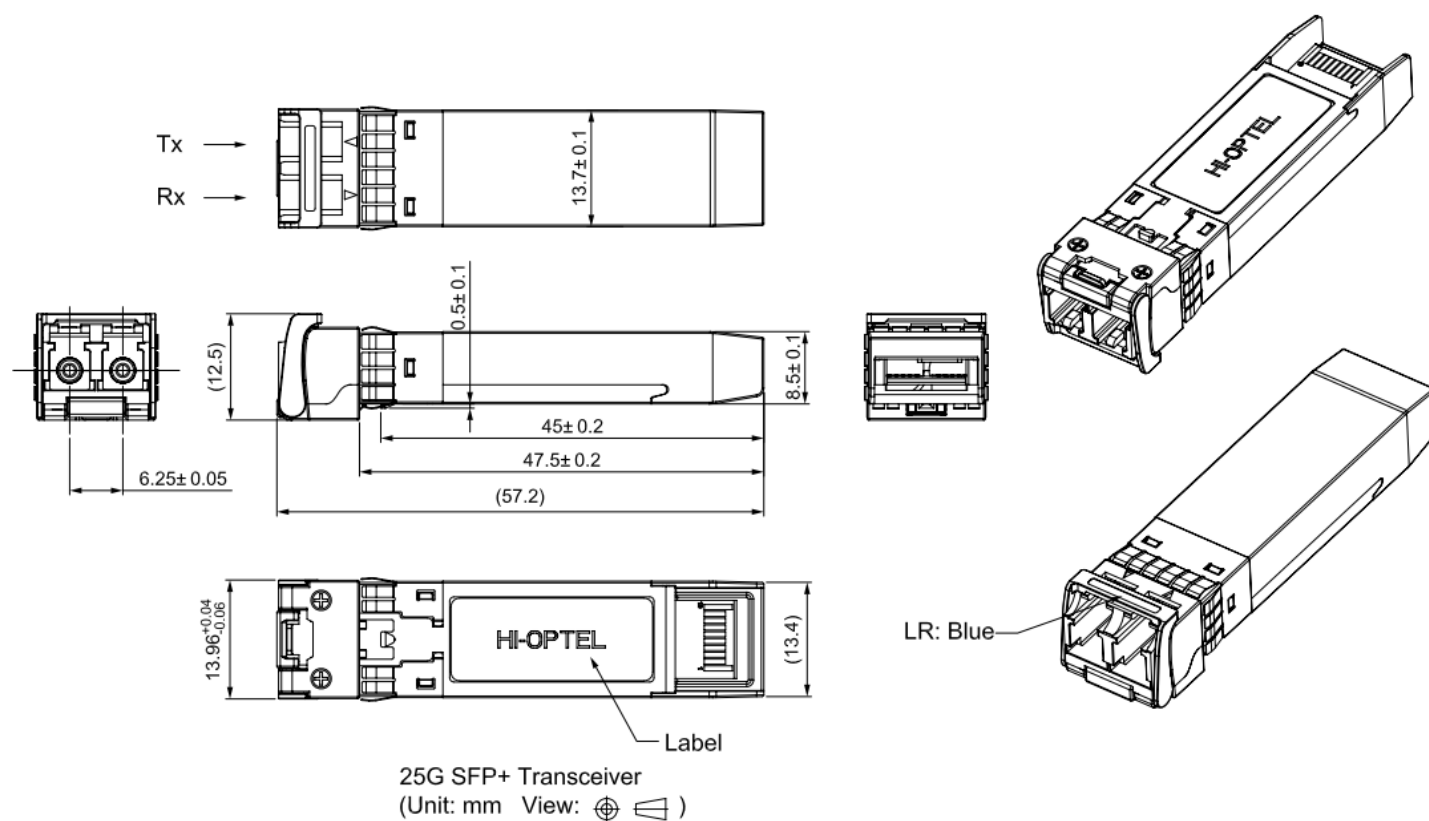

Shenzhen Hi-Optel Technology Co., Ltd.

Hi-Optel Building, BLOG2, Gaofa Technology Park, Longjing, Nanshan Shenzhen, China. 518055

Tel: +86 755 2675 3088

Fax: +86 755 2675309

E-mail: info@hioptel.com

[Http://www.hioptel.com](http://www.hioptel.com)

Page 8 of 7

Rev1.0

Issued Date: 2017-09-30